

# Specifications


## SPRSUN CGK015V3L-B

R32 Refrigerant/Lower Noise/ErP A+++




Power Supply	V/Hz/Ph	220-240/50/1
Sound Pressure (1m)	dB(A)	48
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	59
Net Dimension(L*D*H)	mm	1110×475×810

### CGK015V3L-B Heating capacity

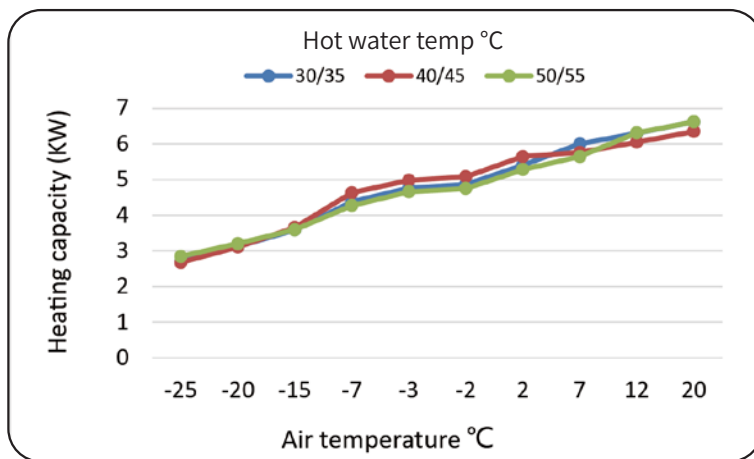

Air temp °C	Heating capacity (kW)		
-25	2.71	2.67	2.84
-20	3.12	3.11	3.21
-15	3.59	3.66	3.59
-7	4.37	4.63	4.27
-3	4.76	4.98	4.66
-2	4.86	5.08	4.75
2	5.40	5.64	5.28
7	6.00	5.76	5.64
12	6.30	6.05	6.31
20	6.62	6.35	6.62
Hot water temp °C	30/35	35/40	40/45

### CGK015V3L-B COP

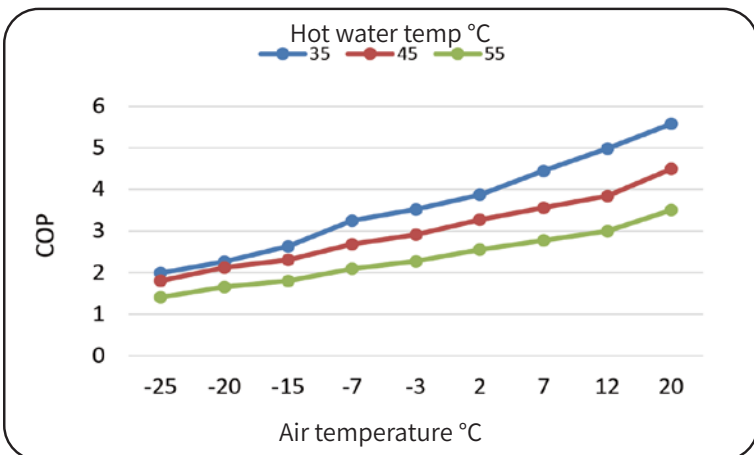

Air temp °C	COP (kW/kW)		
-25	1.99	1.81	1.41
-20	2.27	2.12	1.66
-15	2.63	2.31	1.80
-7	3.25	2.69	2.09
-3	3.52	2.91	2.27
2	3.87	3.28	2.55
7	4.45	3.56	2.78
12	4.98	3.84	3.00
20	5.58	4.50	3.51
Hot water temp °C	30/35	35/40	40/45

\* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



# Specifications




## SPRSUN CGK025V3L-B/CGK-025V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	48
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	78
Net Dimension(L*D*H)	mm	1110×475×810

### CGK025V3L-B/CGK-025V3L-B Heating capacity

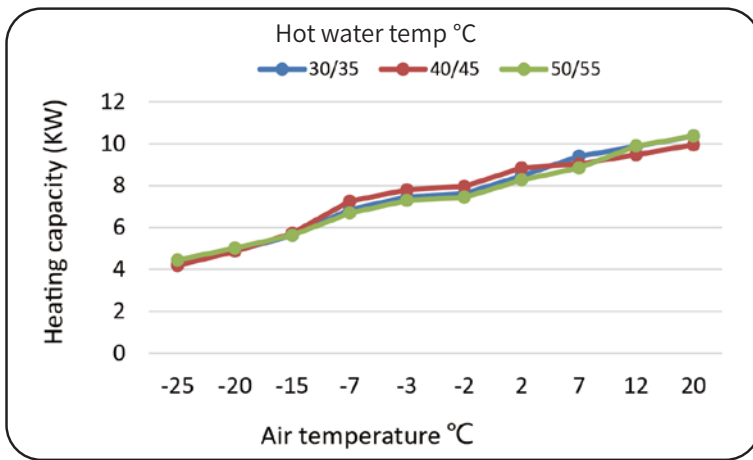

Air temp °C	Heating capacity (kW)		
-25	4.25	4.19	4.46
-20	4.89	4.87	5.02
-15	5.62	5.73	5.63
-7	6.85	7.25	6.69
-3	7.46	7.80	7.29
-2	7.61	7.96	7.44
2	8.46	8.84	8.27
7	9.40	9.02	8.84
12	9.87	9.48	9.89
20	10.36	9.95	10.37
Hot water temp °C	30/35	35/40	40/45

### CGK025V3L-B/CGK-025V3L-B COP

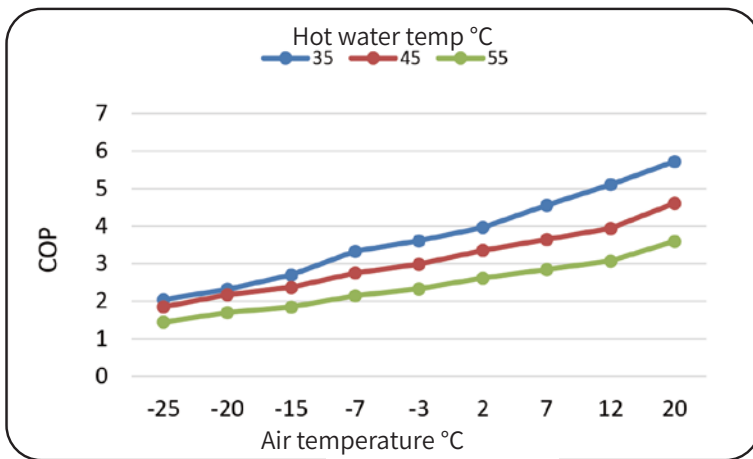

Air temp °C	COP (kW/kW)		
-25	2.04	1.85	1.44
-20	2.32	2.18	1.70
-15	2.70	2.37	1.85
-7	3.33	2.75	2.15
-3	3.61	2.99	2.33
2	3.97	3.36	2.62
7	4.56	3.65	2.85
12	5.11	3.94	3.07
20	5.72	4.61	3.60
Hot water temp °C	30/35	35/40	40/45

\* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



# Specifications




## SPRSUN CGK030V3L-B/CGK-030V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	51
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	88
Net Dimension(L*D*H)	mm	1110×475×810

### CGK030V3L-B/CGK-030V3L-B Heating capacity

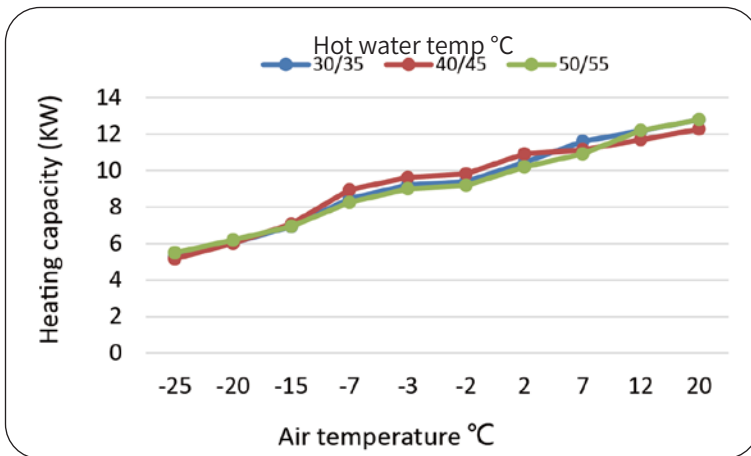

Air temp °C	Heating capacity (kW)		
-25	5.25	5.17	5.50
-20	6.03	6.01	6.20
-15	6.93	7.07	6.94
-7	8.46	8.95	8.25
-3	9.21	9.63	9.00
-2	9.40	9.82	9.18
2	10.44	10.91	10.20
7	11.60	11.14	10.91
12	12.18	11.69	12.20
20	12.79	12.28	12.80
Hot water temp °C	30/35	35/40	40/45

### CGK030V3L-B/CGK-030V3L-B COP

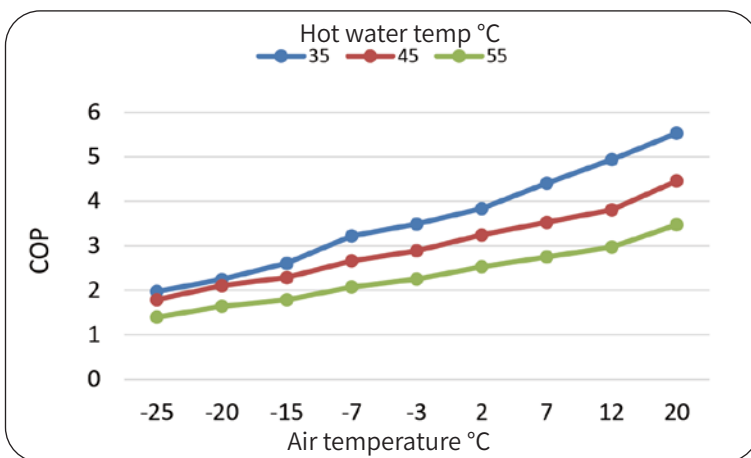

Air temp °C	COP (kW/kW)		
-25	1.98	1.79	1.40
-20	2.25	2.11	1.64
-15	2.61	2.29	1.79
-7	3.22	2.66	2.08
-3	3.49	2.89	2.25
2	3.84	3.25	2.53
7	4.41	3.53	2.75
12	4.94	3.81	2.97
20	5.53	4.46	3.48
Hot water temp °C	30/35	35/40	40/45

\* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



# Specifications




## SPRSUN CGK040V3L-B/CGK-040V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	53
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	88
Net Dimension(L*D*H)	mm	1110×475×960

### CGK040V3L-B/CGK-040V3L-B Heating capacity

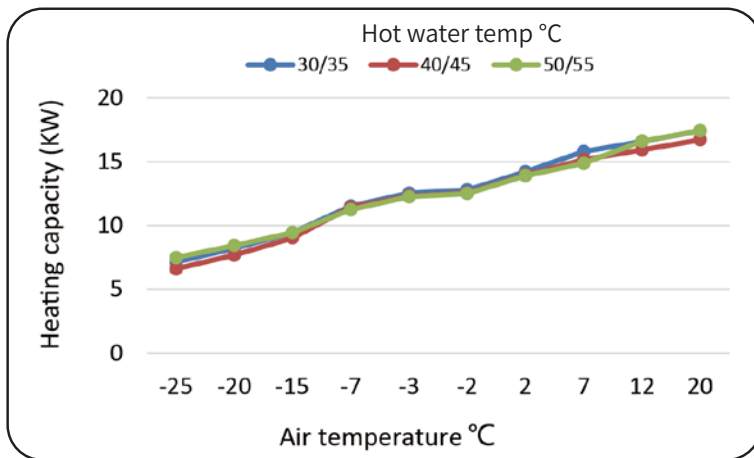

Air temp °C	Heating capacity (kW)		
-25	7.15	6.61	7.49
-20	8.22	7.68	8.44
-15	9.44	9.04	9.46
-7	11.52	11.44	11.24
-3	12.54	12.31	12.26
-2	12.80	12.56	12.51
2	14.22	13.95	13.90
7	15.80	15.17	14.86
12	16.59	15.93	16.62
20	17.42	16.72	17.43
Hot water temp °C	30/35	35/40	40/45

### CGK040V3L-B/CGK-040V3L-B COP

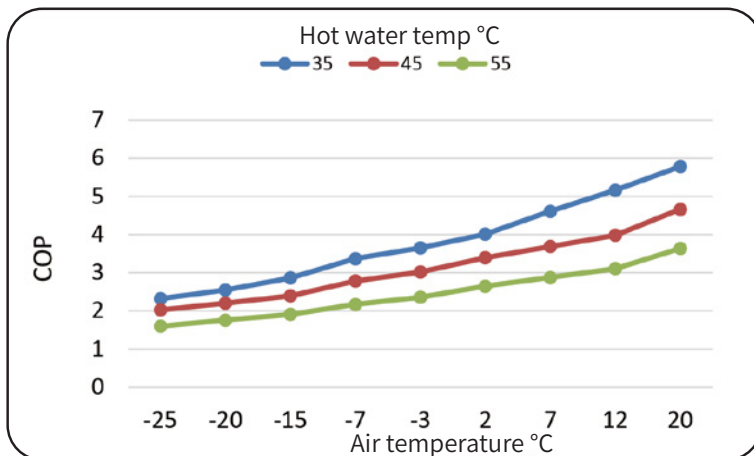

Air temp °C	COP (kW/kW)		
-25	2.32	2.03	1.60
-20	2.55	2.20	1.76
-15	2.86	2.39	1.91
-7	3.37	2.78	2.17
-3	3.65	3.02	2.36
2	4.01	3.39	2.65
7	4.61	3.69	2.88
12	5.16	3.98	3.11
20	5.78	4.66	3.63
Hot water temp °C	30/35	35/40	40/45

\* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



# Specifications




## SPRSUN CGK050V3L-B/CGK-050V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	54
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	88
Net Dimension(L*D*H)	mm	1110×475×1355

### CGK050V3L-B/CGK-050V3L-B Heating capacity

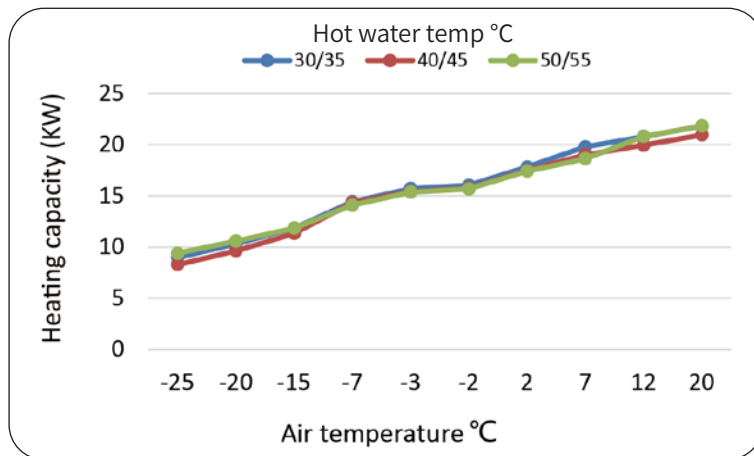

Air temp °C	Heating capacity (kW)		
	30/35	40/45	50/55
-25	8.96	8.28	9.39
-20	10.30	9.63	10.58
-15	11.84	11.33	11.85
-7	14.43	14.34	14.09
-3	15.72	15.42	15.36
2	16.04	15.74	16.68
7	17.82	17.49	17.42
12	19.80	19.01	18.63
20	20.79	19.96	20.83
20	21.83	20.96	21.85
Hot water temp °C	30/35	35/40	40/45

### CGK050V3L-B/CGK-050V3L-B COP

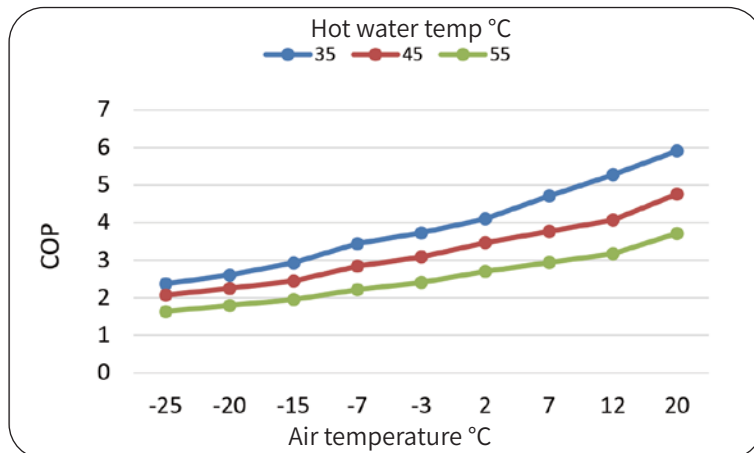

Air temp °C	COP (kW/kW)		
	30/35	35/40	40/45
-25	2.37	2.07	1.63
-20	2.60	2.25	1.80
-15	2.93	2.44	1.95
-7	3.44	2.84	2.22
-3	3.73	3.09	2.41
2	4.10	3.47	2.70
7	4.71	3.77	2.94
12	5.28	4.07	3.17
20	5.91	4.76	3.71
Hot water temp °C	30/35	35/40	40/45

\* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



# Specifications




## SPRSUN CGK060V3L-B/CGK-060V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	56
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	124
Net Dimension(L*D*H)	mm	1110×475×1355

### CGK060V3L-B/CGK-060V3L-B Heating capacity

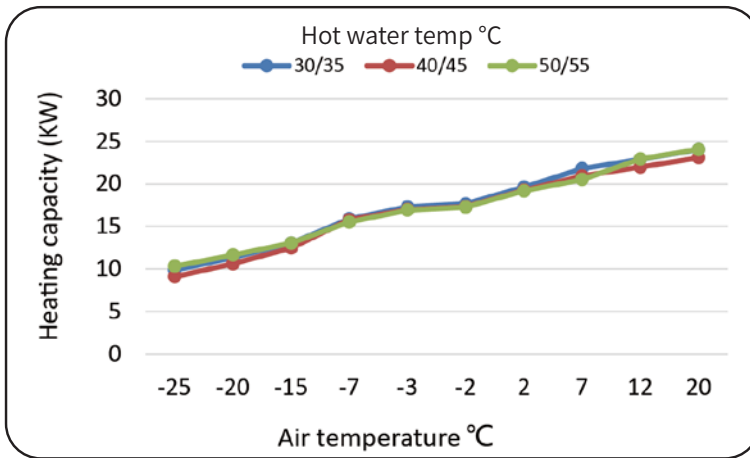

Air temp °C	Heating capacity (kW)		
-25	9.86	9.12	10.33
-20	11.34	10.60	11.65
-15	13.03	12.47	13.05
-7	15.89	15.79	15.51
-3	17.30	16.98	16.91
-2	17.66	17.33	17.26
2	19.62	19.25	19.18
7	21.80	20.93	20.51
12	22.89	21.97	22.93
20	24.03	23.07	24.05
Hot water temp °C	30/35	35/40	40/45

### CGK060V3L-B/CGK-060V3L-B COP

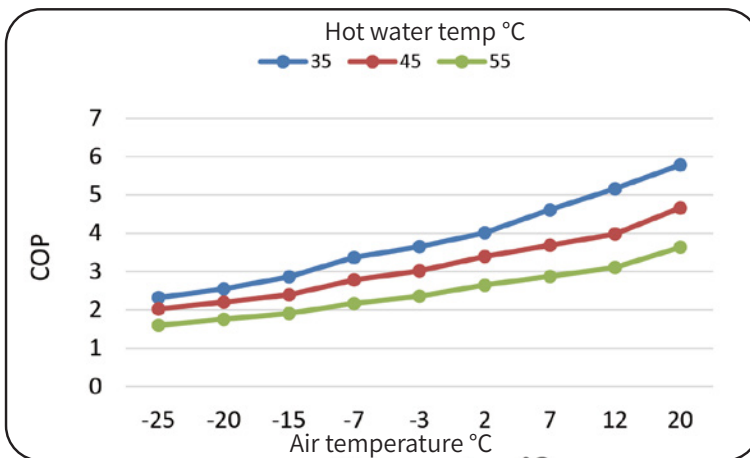

Air temp °C	COP (kW/kW)		
-25	2.32	2.03	1.60
-20	2.55	2.20	1.76
-15	2.86	2.39	1.91
-7	3.37	2.78	2.17
-3	3.65	3.02	2.36
2	4.01	3.39	2.65
7	4.61	3.69	2.88
12	5.16	3.98	3.11
20	5.78	4.66	3.63
Hot water temp °C	30/35	35/40	40/45

\* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.

